


Product advantage

1. The combustion chamber water tank is fixed together with nuts and inner tank and can be disassembled. If the water tank leaks or burns, it can be easily repaired and replaced (movable water tank).



2. Equipped with an adjustable float, you can adjust the nut on the float rod to adjust the water level according to the water source pressure of the water inlet, until the water level

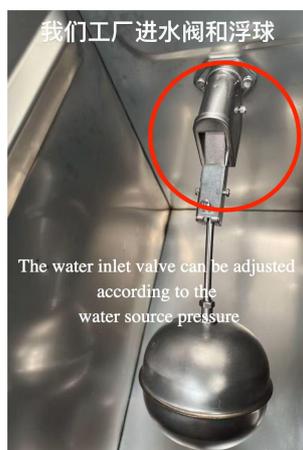


3. The height is about two centimeters above the height of the combustion chamber water tank. It not only avoids dry burning of the water tank, but also prevents the water source from flowing out of the box from the door due to excessive water inflow (solving the problem of foreign water source pressure).



4. The ignition switch uses a plug valve with flameout protection function. When the fire exhaust is extinguished, the probe will automatically close the air intake valve if it cannot sense the fire source to improve the safety of use.



5. The casters are equipped with two 5-inch directional and two 5-inch brake wheels, which are easy to move and more stable to fix.

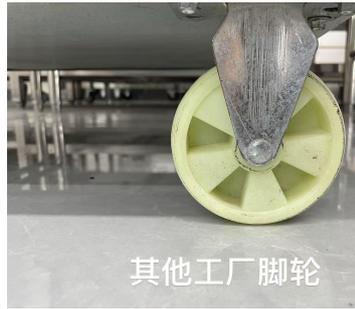

6. The domestic fire source caliber is 0.5, and the foreign liquefied gas fire source caliber is 0.35, which can be adjusted according to local needs.